ASLAN®

AQUA STONE BINDER

SINGLE-COMPONENT WATER-BASED LANDSCAPE AGGREGATE BINDER



www.aslanboya.com

ASLAN®

AQUA STONE BINDER

SINGLE-COMPONENT WATER-BASED LANDSCAPE AGGREGATE BINDER



HOLDS & FIXES LOOSE STONES:
Aqua Stone Binder is a gravel binder designed to securely hold together 4-20mm stones. Apply and allow to dry for 72 hours under warm and dry weather conditions (5°+). For foot traffic areas, we recommend using stones with a diameter of 4-10mm for the strongest bond.

NON-TOXIC AND WATER BASED:
Aqua Stone Binder is environmentally friendly and will not harm your pet or child should they come in contact with the treated mulch.

YEAR-ROUND ASSURANCE:
Our special formula dries quickly and provides full protection for up to 3 years. Spend less time sweeping and maintaining your landscape!

100% SATISFACTION GUARANTEE:
Join countless satisfied customers who trust Aqua Stone Binder for superior landscape binding and take advantage of our risk-free guarantee.

READY TO USE:
No need to dilute, Easihold is ready to use straight out of the bottle! Simply pour-on, spray-on or mix-in with your stones, gravel or mulch for a stable finish.



UV RESISTANT

SOLVENT FREE

NON YELLOWING

Floors Are Secure with

AQUA STONE BINDER YOUR LANDSCAPE UNDER CONTROL

With its special structure that binds stones together, **Aqua Stone Binder** eliminates shifting and dusting. It combines aesthetics and functionality in garden landscaping, offering smooth, comfortable surfaces where children can step safely. Discover the smart solution for professional landscaping.



AQUA STONE BINDER

HOW-TO: SPRAY METHOD

DAY ONE

STEP 1

SHAKE & PREPARE

5 L
169 oz

Shake bottle well and pour Aqua Stone Binder into your sprayer. We recommend using an Airless Sprayer.



800 ml/27 oz

Shake bottle well and ensure nozzle is set to the correct setting.



STEP 2

SPRAY COAT 1





Apply the first coat to your clean and dry surface, spraying slowly and controlled, ensuring an even coverage – Remember, **LESS IS MORE** with Aqua Stone Binder. Do not to oversaturate!

STEP 3

RAKE & TURN





After applying the first coat, rake/turn the rocks or mulch to expose the uncoated material. This is to ensure your surface is fully coated with Aqua Stone Binder throughout.

STEP 4

COAT 2 & COMPACT





Follow the same method as Step 2 for second coat. Once an even coverage has been achieved, compact your surface using a trowel or a large, flat piece of wood for best binding results.

DAY TWO

LEAVE TO DRY FOR 12-36 HOURS

STEP 5

APPLY
TOP COAT





Once the first two coats are dry, apply the third and final topcoat to your surface.
NO NEED TO TURN AGAIN.
Allow to dry and repeat topcoat for extra hold, if necessary.

COVERAGE RATES

1 full application= 3 coat

AREA SIZE	AMOUNT PER COAT
1m²/10ft²	208 ml/4,5 fl ons
2m²/20ft²	416 ml/13 fl ons
4m²/40ft²	833 ml/26 fl ons
8m²/80ft²	1666 ml/52 fl ons

TIPS TO BOOST STAMINA

Compaction is key to acheiving the best hold possible for your surface, increasing strength by

70%!

TO REDUCE THE RISK OF CLOGGING

Flushing your sprayer with warm water after each coat will reduce the

risk of blockages.

IN CASE OF SPILLAGE OR SPLASHING

In the event of spillage use hot, soapy water and scrub to remove

Aqua Stone Binder.

HOW-TO: MIX METHOD

STEP 1

MIX



Pour Aqua Stone Binder in a mixing bucket with your rocks/mulch at a ratio of 1:25 by volume. Mix until all material is coated evenly.

DO NOT OVERSATURATE.

See table on the right of the

STEP 2

POUR & SPREAD



Pour your mixed material to the desired area and spread at a depth of approx 20mm/¾" ensuring the area is permeable to all for full drainage.

STEP 3

COMPACT



Compact the stones or mulch using a trowel or large, flat piece of wood. A flattened compacted surface will produce the best binding results.

LEAVE TO DRY FOR 12-36 HOURS.

MIXING RATIOS	
Volume of stones/mulch	**Quantity of Easihold to mix**
10kg/22lbs	400ml/13.5fl oz
15kg/33lbs	600ml/20fl oz
20kg/44lbs	800ml/27fl oz
25kg/55lbs	1L/34fl oz
30kg/66lbs	1.2L/40.5fl oz

REMEMBER

Ensure that your stones/mulch are **CLEAN & DRY** before applying Aqua Stone Binder.

TECHNICAL INFORMATION

SURFACE RECOMMENDATIONS

SURFACE DEPTH	BEST RESULTS	GOOD RESULTS	NOT RECOMMENDED
8-12 mm		✓	
13-20 mm	✓		
21-24 mm		✓	
<8mm/>25mm			⊘

STONE SIZE	BEST RESULTS	GOOD RESULTS	NOT RECOMMENDED
4-7 mm		✓	
8-18 mm	✓		
19-25 mm		✓	
<4mm/>25mm			⊘

RECOMMENDED MULCH


BARK MULCH


RUBBER MULCH


CEDAR MULCH


STRAW MULCH


IDEAL WEATHER CONDITIONS


WEATHER CONDITIONS FOR 48 HRS FROM FIRST APPLICATION

Temperature	Minimum 5°C/41°F
Humidity	Maximum %85
Rain/Snow	No Precipitation

HOW IT WORKS



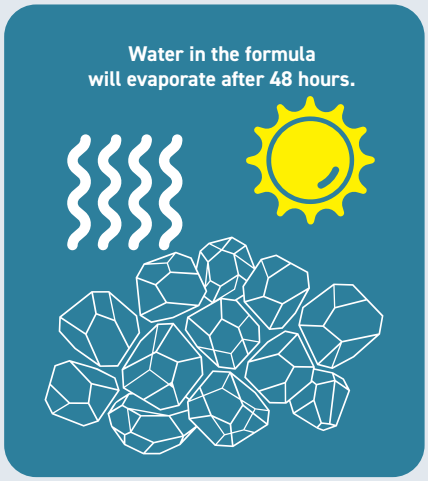

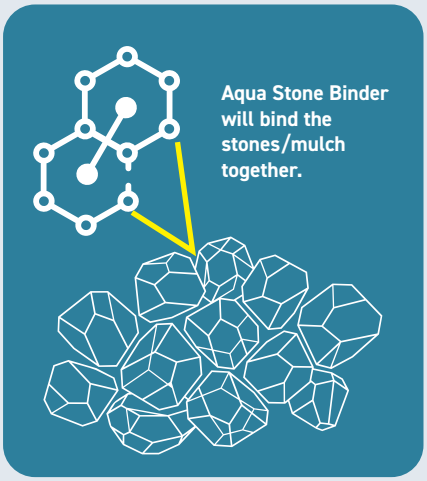

AFTERCARE

- Allow to dry: Keep the surface free from any weight or pressure for the first 24 hours after the final coat.
- Reapply every 12 months in high footfall areas and every 24 months for decorative use.
- Remove any loose stones to avoid further abrasion on remaining stones.



ASLAN®

www.aslanboya.com

BMP TRADE LTD
Haspolat Kirli Sanayi Bölgesi
Güney Sokak Lefkoşa Kıbrıs
Phone:+90 392 365 65 23
Fax: +90 392 365 06 70
E-mail: info@aslanboya.com

SEMRA LTD
Büyük Sanayi Bölgesi NO:172
Gazimağusa Kıbrıs
Phone: + 90 392 444 80 00
Fax: + 90 392 365 06 70
E-mail: bilg@semragroup.com